


## Data-sheet

| Product   | technical datas  | Options  | Standards |
|-----------|--|--|-----------|
| ISP 4-mot | Input/Output 29V/DC  | different cable or socket<br>In/outputs possible |           |
|           | Max. Output Current 5A/DC  | Massage Option                                   |           |
|           | 4 Motor Output   | free programmable                                |           |
|           | Intermitted mode with 10 % duty cycle with<br>max. continuous use of 2 min | mounting feets                                   |           |
|           | Protection type IP20   |  |           |
|           | Overload Protection  |  |           |
|           | Overcurrent Protection   |  |           |
|           | Housing colour black RAL 9005  |  |           |
|           | Housing material ABS V0  |  |           |
|           | Ambient temperature 30°C   |  |           |
|           | Dimensions (lxxh)<br>174,5mmx83,75mmx39,6mm<br>weight 310g                 |  |           |



ISP 4-mot

| H [mm] | L [mm] | W [mm] |
|--------|--------|--------|
| 40     | 175    | 84     |

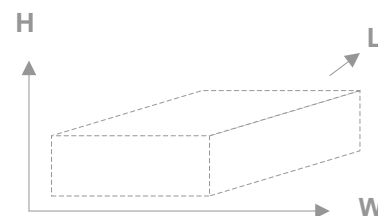

General dimension